

ENCHANT SERIES

BUILT-IN DEEP EMBER BED ELECTRIC FIREPLACE

HARMONIE™



ENCHANT-59 with Clear & Black Crystals & Oak Logs

FEATURES

- Matte black non-reflective metal trim finish
- Deep ember bed holds more media
- 10 LED flame, ember bed, down light colours
- 4 flame speeds
- 5 flame brightness levels
- 4 ember bed brightness levels & pulsating
- High/low heat settings & thermostat
- Overheat protection
- Can use flame without heat
- Timer 30 minutes to 8 hours
- Sizes 43 & 59 inches wide

TECHNICAL SPECS

Volts / Amps	120 / 15
Heater High / Low	1500W / 750W
BTU High / Low	5100 / 2550
Heats	400ft ²

INSTALLATION

- Install built-in recessed
- Plug-in or hardwire
- Installation hardware kit included

OPERATION

- Touch panel
- Remote control (included)

Enchant /In'tjænt/en-chant/ v **1** to subject to magical influence; charm. **2** to delight to a high degree.

HARMONIE™

ENCHANT SERIES

BUILT-IN DEEP EMBER BED ELECTRIC FIREPLACE



ENCHANT-59 with Clear & Black Crystals & Oak Logs

Media	Included
Clear Crystals	✓
Black Crystals	✓
Large Clear Crystals	✓
Split & Charred Oak Logs	✓
Birch Logs	Optional



Birch Logs with Clear Crystals



Split & Charred Oak Logs with Black Crystals






Large Clear Crystals with Clear Crystals



ENCHANT-59 with Clear & Black Crystals & Oak Logs

DIMENSIONS

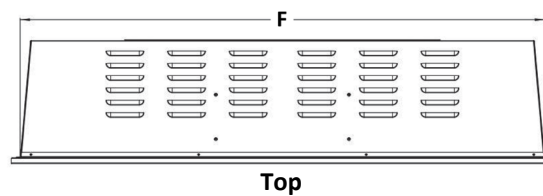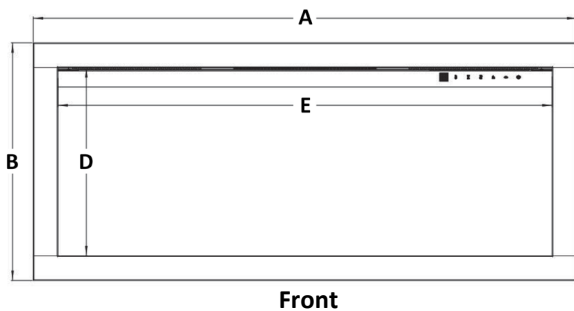

Model	Product Dimensions (Inches)								Framing Dimensions		
	A	B	C	D	E	F	G	H	Wide	High	Deep
ENCHANT-43	43-5/16	18-7/8	9-7/8	15	39-3/8	42-1/16	18	9-3/8	42-1/4	18-1/4	10
ENCHANT-59	59	18-7/8	9-7/8	15	55-1/8	57-13/16	18	9-3/8	58	18-1/4	10

